



## VALVOLA METALLICA A 90°

### FLANGIATA


#### DESCRIZIONE

Caratteristiche	
<b>Materiale</b>	GG25
<b>Misure</b>	3" - 4" - 5" Flangia
<b>0,3 - 16 Bar</b>	BP: 0,3 bar - 3,5 bar Standard: 0,6 - 6 bar AP: 1-16 bar
<b>Rivestimento</b>	Poliestere
<b>Membrana</b>	Gomma naturale opzionale: Viton e EDPM
<b>Filettatura</b>	BSP e NPT
<b>Molla</b>	Inox.

	DN 80	DN 100	DN 125
<b>Kv</b>	130 m <sup>3</sup> /h	240 m <sup>3</sup> /h	250 m <sup>3</sup> /h
<b>Peso</b>	15,75 kg	25 kg	28 kg

m <sup>3</sup> /h	20	30	40	50	60	70	80	90	100	125	150	200		
<b>DN80 90°</b>	0,28	0,63	1,12	1,75	2,52	3,43	4,48	5,67	7,00	10,94				
<b>DN100 90°</b>		0,16	0,28	0,43	0,63	0,85	1,11	1,41	1,74	2,71	3,91	6,94		
<b>DN125 90°</b>			0,26	0,40	0,58	0,78	1,02	1,30	1,60	2,50	3,60	6,40	8,10	10,00

\* Flusso consigliato in grassetto.

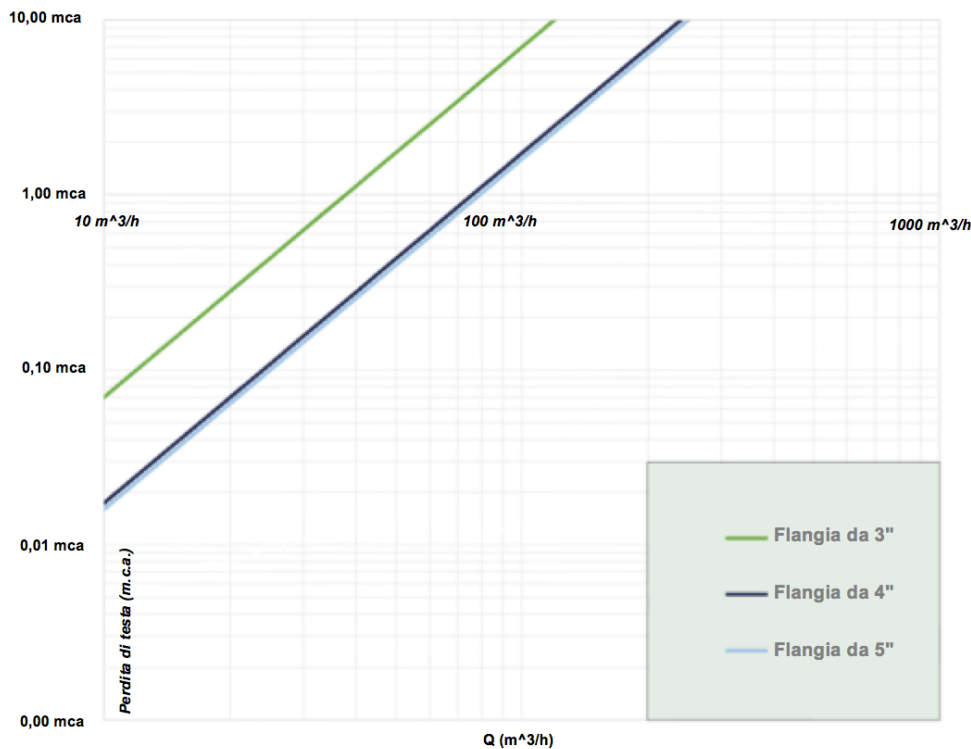

**BIG ROCK s.r.l.**

Via della Rocchetta, 35 - 00065 Fiano Romano, Roma (RM)  
www.bigrockitaly.it info@bigrockitaly.com Cell. +39 334 8300896

